Remington Arms Company, Inc. 870 Remington Drive PO Box 700 Madison, NC 27025-0700 (336) 548-8700 800-243-9700

REMINGTON Arms Company, Inc.

MODEL 17 REPEATING SHOTGUN

- Shooting Safety Commandments
- Information
- Instructions for Operation & Care of Rifle
- Components Parts Listing
- · Value and Reference Book Listing

NOTE: We are pleased to accommodate your request for the Model 17 Repeating Shotgun information. The following documentation represents all information available on this model from the Remington Arms Co., Inc.


DO NOT MAKE CHANGES OR ALTERATIONS TO ANY PARTS OF A FIREARM. USE ONLY REMINGTON PARTS. NEVER MAKE AN ADJUSTMENT TO THE TRIGGER, OR CHANGE THE SHAPE OR SIZE OF THE SEAR, SEAR NOTCH, OR OTHER PARTS.

Ten Commandments of Shooting Safety

- 1. Always keep the muzzle pointed in a safe direction.
- 2. Firearms should be unloaded when not in use.
- 3. Don't rely on your gun's "safety".
- 4. Be sure of your target and what is beyond it.
- 5. Use correct ammunition.
- 6. If your gun fails to fire when the trigger is pulled, handle with care!
- 7. Always wear eye and ear protection when shooting.
- 8. Be sure the barrel is clear of obstructions before shooting.
- 9. Do not alter or modify your gun, and have guns serviced regularly.
- 10. Learn the mechanical and handling characteristics of the firearm you are using.

Model 17 Repeating Shotgun

Made in 20 Gauge Only



olid Breech

Hammerless

Take-Down

HF. new Remington, 20-gauge Repeating Shotgun, Model 17, in a shotgun of this type and gauge. embodies several features which have never before been available


afety features and loads and ejects from the bottom. portsmen for many years. It has the same solid breech, hammerless and 2-gauge Repeating Shotgun, which has been popular with discriminating In graceful outline and perfect balance, it resembles the Remington

beavy loads for loog range shooting. designed for either a 2½-inch or 2¾-inch shell permits the use of extremely The action of the Model 17 is very fast and smooth. The gun being

remain attached to the receiver. the harrel is simple and quickly performed; the magazine and fore-end The take-down operates on an cotirely new principle. Removing

trigger guard, where it is easy and convenient to operate. The safety lock is of the cross holt type, located at the rear of the

cocked, is located at the forward end of the trigger guard, and is operated by the index finger. The action bar lock, which is pulled back to open the action when



down on tuke as far as possible. bar, and at same time move the fore-eod rearward action may be left either open or closed when the guo is put in case To Take Down press rearward on action bar lock at trigger guard to release action in tube as far as possible. If cap is tight, pull out magazine cop pin to use as a Rotate barrel a quarter turn so lug will project to left and pull borrel out of r. The barrel may then be easily cleaned and inspected from the breech. The Screw magazine cap (to right)



Page 32

Remington

Model 17 Repeating Shotgun Made in 20 Gauge Only

tightly against barrel lug. the barrel and the receiver is automatically taken up when magazine cap is turned sbould now be opened to allow harrel to be placed into receiver. Looseness between To Put Together assemble in reverse order, and if action has been closed it

tom opening and push forward into magazine until past the cartridge stop. The magazine holds four shells. To Load Magazine close action by pushing slide handle forward; place shell in bot-


guard and pull slide handle fully rearward to release shell from magazine; push forward to close action. Another shell may then be placed into magazine, giving a capacity of To Load the Barrel from Magazine press rearward on action har lock at trigger

This can be done only when the gun is cocked. To fire, move safety to left. To Make Safe When Loaded push safety at rear of trigger from left to right.


action bar and pull fore-end rearward. To Open Gun When Cocked or Loaded press rearward on action bar lock to release

forward end of cartridge stop on left side. Shell will then be pushed into loading opening by magazine spring. This is a very convenient feature, making it unnecessary to feed loaded shells into and out of the chamber. To Remove Loaded Shell from Magazine place finger inside of receiver and depress

a shell on bottom of carrier, and close action, holding shell with slight pressure upward, when shell will be carried directly into chamber. To Use as a Single Loader open action by pulling fore-end rearward; place



ACTION OPEN





Made in 20 Gauge Only

No. 17A. "Standard" Grade

Furnished with barrel having matted top aurisce or raised solid matted sib instead of plain at extra charge. For illustration see page 35. Extra interchangeable barrels furnished at additional charge.

SPECIFICATIONS:—Remington steel barrel, 26, 28, 30 or 32 inches, full choke, modified choke or cylinder bore; full and modified choke barrels furnished in 28-inch and cylinder bore in 26-inch unless otherwise specified. 28-inch full choke regular. NOT MADE LONGER THAN 32 INCHES. Top of receiver matted. American Walnut stock and fore-end. Half pistal grip stock regular dimensions 13% inches long, 2% inches drop at heel, 1% inches drop at comh. Any other dimensions made to order at extra charge, requiring five or six weeks' time. Magazine holds four shells, which with one in the chamber give a capacity of five shots without releading. Weight, about 5% pounds. Length over all, 47 inches and length taken down, 31% inches with 28-inch harrel.



No. 17B "Special" Grade

Furnished with harrel having matted top surface or raised solid matted rib instead of plain at extra charge. For illustration see page 35. Eatra interchangeable barrels furnished at additional charge.


SPECIFICATIONS:—Same as No. 17A "Standard" Grade, except stock and fore-end are of selected imported without nently checkered. Half pistol grip. Standard dimensions carried in slock. Will furnish mails to order, without extra charge, subject to five or six weeks' delay, lengths from 13½ inches to 15 inches, drops 2 inches to 3½ inches at heel and 1½ to 1¾ inches at comb. Stock dimensions outside of these limits made to order at extra charge, requiring five or six weeks' time.

Extras for 20 gange pump gan Model 17 firted on page 191.

Solid Breech


Hammerless.

Take-Down

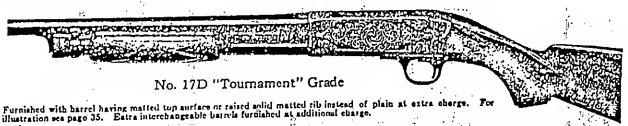

SPECIFICATIONS:—Remington steel barrel, 28 inches, full choke; option of modified or cylinder; 26, 30 or 32-inch full choke, modified or cylinder furnished to order at no extra charge. NOT-MADE LONGER THAN 32 INCHES. Top of receiver matted. Specially selected imported walnut stock and fore-end, neatly finished by hand with attractive checkering. The receiver and barrel are linished in a rich scroll, hand engraved. Weight, length and stock dimensions some as No. 17A "Standard" Grade. Other stock dimensions made to order at no extra charge, requiring six to eight weeks' time.






Furnished with barrel having matted top surface or raised solid matted tils instead of plain at axtra charge, illustration see page 35. Extra interchangeable barrels furnished at additional charge.

SPECIFICATIONS:—Remington steel barrel, 28 inches, full choke; option of modified or cylinder; 26, 30 or 32-inch full-choke, modified or cylinder furnished to order at no extra charge. NOT MADE LONGER THAN 32 INCHES. Top of receiver matted. Choicest imported walaut stock and fore-ead, handsomely checkered by hand. Silver name plate inlaid in stock. When specified, owner's initials engraved on name plate without extra charge. The barrel and receiver are finishe with a beautiful deep scroll, hand engraved, with panel on left side of receiver. All working parts are hend polished. Weight, length and slock dimensions same as No. 17A "Standard" Grade. Other stock dimensions made to order at no extra charge, requiring six to eight weeks' time.

Extras for 20 gauga pump gun Model 17 listed on page 101.


SPECIFICATIONS:—Remington steel barrel, 28 inches, full choke; option of modified or cylinder; 26, 30 or 32-inch full choke, modified or cylinder furnished to order at no extra charge. NOT MADE LONGER THAN 32 INCHES. Top of receiver matted. Finest Circagaian walnut stock and fore-end, finished by hand with delicate and elaborate checkering. Gold name plate inisid in stock. When specified, nwner's initials engraved on name plate without extra charge. The barrel and receiver are finished with a beautiful deep acroll, hand engraved, which brings out the game panels in relief. All working parts are hand polished. Weight, length and stock dimensions same as No. 17A "Standard" Grade. Other stock dimensions made to order at no extra charge, requiring from six to eight weeks' time.

Solid Ribbed Barrel for Model 17 Repeating Shotgun



Ventilated Ribbed Barrel Not Furnished On Model 17 Gun

The solid ribbed barrel prevents the reflection of light on the top of harrel from interfering with the shooter's line of sight. This festure is particularly appreciated by shooters who have used a dnuble gun. The barrel and rib are made in one solid piece, consequently we cannot fit a rib on a plain barrel.

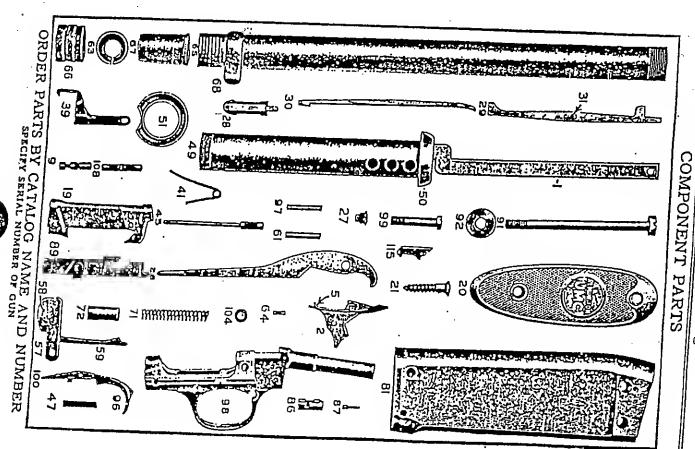





Remington,

Model 17 Repeating Shotgun

COMPONENT PARTS PART PRICE ∴B.O. Artion Bar, A and B Magazine Cap Stop Plunger B.O. 64 Grades . Plunger Magazine and Guide Magazine Cap Magazine Follower Action Bar, D Grade. Action Bar, E Grade. Action Bar, F Grade. Action Bar, Lock. B.O. 65 B.O. 66 B.O. 67 B.O. 69 BO. B.O. 13.0. B.O. 70 B.O. 71 B.O. 72 B.O. 73 B.O. 104 Action Bar Lock Spring B.O. (top). Main Spring Follower Main Spring Follower Main Spring Stop Pin Main Spring Retaining B.O. Action Bar Lock Spring (bottom) Action Bar Retaining BO. Main Spring Retaining Plug Magazine Cap Pin Magazine Cap Pin Plunger Magazine Cap Pin Plunger Spring Magazine Cap Pin Plunger Screw Magazine Cap Stop Plunger Pin Magazine Cap Stop Plunger Spring Plunger Spring Plunger Spring Plunger Spring Plunger Spring Pin Action Bar Retaining Pin Pin Action Bar Retaining Pin Spring Breech Block Breech Block Complete Butt Plate Butt Plate Carrier B.O. 10 B.O. 108 B.O. 109 B.O. 11 B.O. 110 B.O. 1914 B.O. 20 B.O. 21 B.O. 111 B.O. 74 B.O. B.O. Carrier Screw (2) Carrier Screw (2) Carridge Guide Cartridge Stop (right) Cartridge Stop (left) Cartridge Stop Left Pivot Screw Cartridge Stop Spring B.O. 75 B.O. 28 B.O. 29 Plunger Spring Plug Screw Receiver, A and B Grades Receiver, D Grade Receiver, E Grade Receiver, F Grade . 1 B.O. 76 B.O. B.O. 81 B.O. 81 B.O. 81 B.O. 81 B.O. 66 B.O. 87 B.O. 88 B.O. 93 B.O. 33 Cartridge Stop Spring (lest) Carrier Screw Locking B.O. 34 Safety Safety Plunger Safety Plunger Spring Safety Plunger Retain-Screw B.O. 39 B.O. 40 B.O. 41 B.O. 45 Extractor Extractor Pin Salety Plunger Retaining Screw Slide Stock, A Grade Stock, B Grade Stock, D Grade Stock, E Grade Stock, F Grade Stock Bolt Screw Extractor Spring Firing Pin Firing Pin Retaining B.O. 89 B.O. 90 B.O. 90 B.O. 90 B.O. 90 B.O. 91 B.O. 92 45 B.O. 46 Pin Firing Pin Spring Fore end, A Grade Fore end, B Grade Fore-end, D Grade Fore-end, E Grade Fore-end, F Grade 48 Stock Bolt Screw Washer Trigger B.O. B.O. B.O. B.O. Fore end Tube Nut. Front Sight B.O. 96 B.O. 97 Trigger Pin Hammer Trigger Plate, A and B Grades Trigger Plate, D Grade B.O. 115 Hammer Catch Hammer Catch Pin Hammer Link B.O. 98 BO. 116 BO. 50 B.O. 60 B.O. 98 Hammer Link Pin Hammer Pin B.O. 98 Trigger Plate, E Grade B.O. 98 Trigger Plate, F Grade Magazine Spring Re-Trigger Plate Screw . B.O. 99 tainer B.O. 100 Trigger Spring . .



Firearms Value & Reference Books

NOTE: We do not provide information on firearms' values. You may want to have your firearm appraised by a gunsmith. The following sources may also be helpful. We do not accept responsibility for the goods or services provided by these sources.

Firearms Value Books

Blue Book of Gun Values
Blue Book Publications
8009 34th Avenue South #175
Minneapolis, MN 55425
800-877-GUNS

Flayderman's Guide to Firearm Values
Gun List
Modern Gun Values
Krause Publications
700 East State Street
Iola, WI 54990-0001
847-573-8530

Gun Trader's Guide
Stoeger Publishing Company
5 Mansard Court
Wayne, NJ 07470
973-872-9500

Reference Books

The Remington 700
John Flacy
Brownells, Inc.
200 South Front Street
Montezuma, IA 50171
515-623-5401

Shooter's Bible
Stoeger Publishing Company
5 Mansard Court
Wayne, NJ 07470
973-872-9500

Cartridges of the World
Frank C. Barnes
Standard Catalog of Firearms
Krause Publications
700 East State Street
Iola, WI 54990-0001
847-573-8530

Remington, America's Oldest Gunmanker Remington Arms Co. PO Box 700 Madison, NC 27025 Attention: History Book 800-423-8495

the second second * 7 .

, , . .

a second 4 7 3 1 4

. :

e e e